

08-15-00

A

08/14/00

08/14/00

08/14/00

Please type a plus sign (+) inside this box ☐ **PTO/SB/05 (4/98)**
 Approved for use through 09/30/2000. OMB 0651-0032
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. **22350/14**

First Inventor or Application Identifier **Yaron Ruziak**

Title **Network Communications Link**

Express Mail Label No. **EL 167 821 685 US**

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)

2. ☒ Specification (preferred arrangement set forth below) [Total Pages **30**]

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **9**]

4. Oath or Declaration [Total Pages **1**]

a. ☒ Newly executed (original or copy)

b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)

i. ☐ DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

NOTE FOR ITEMS 1 & 15: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Attorney (when there is an assignee) ☐ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ Small Entity Statement(s) ☒ Statement filed in prior application, (PTO/SB/09-12) Status still proper and desired
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☒ Other: **Postcard**

cover letter
check for \$615.00

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No. **08/992,934**

Prior application information: Examiner **Alpus H. Hsu** Group / Art Unit: **2738**

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name **Amster, Rothstein & Ebenstein**

Address **90 Park Avenue**

City **New York** State **NY** Zip Code **10016**

Country **U.S.A.** Telephone **212-697-5995** Fax **212-286-0854**

Name (Print/Type) **Michael J. Berger** Registration No. (Attorney/Agent) **25,829**

Signature **[Signature]** Date **August 14, 2000**

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

AMSTER, ROTHSTEIN & EBENSTEIN

ATTORNEYS AT LAW

PATENTS • TRADEMARKS • COPYRIGHTS

90 PARK AVENUE

NEW YORK, NEW YORK 10016

TELEPHONE: (212) 697-5995

FACSIMILE: (212) 286-0854

MORTON AMSTER
DANIEL S. EBENSTEIN
PHILIP H. GOTTFRIED
MICHAEL J. BERGER
NEIL M. ZIPKIN
ANTHONY F. LO CICERO
JOEL E. LUTZKER
KAREN ARTZ ASH
KENNETH P. GEORGE
ABRAHAM KASDAN, Ph.D.
LEONARD S. SORGI
IRA E. SILFIN

JESSE ROTHSTEIN (RETIRED)

INTERNATIONAL DEPARTMENT
DAVID R. BROWN (NON-LAWYER)
PATRICK E. BOLAND*
JAN TAMULEWICZ
MAX VERN

NEAL L. ROSENBERG
CHESTER ROTHSTEIN
DAVID H. KAGAN
DENISE A. LINDENAUER
CRAIG J. ARNOLD
NANCY M. DODDERIDGE
CHARLES R. WACEDO
TREVOR LLOYD
DONNA L. ANGOTTI
JANE UNGARO
JOSEPH M. CASINO
JOHN S. ECONOMOU
SIMON BOCK
BETH KOTKIN
MARK J. ROSENBERG
MICHAEL V. SOLOMITA

HOLLY PEKOWSKY
IAN R. BLUM
MICHAEL P. KENNEY
KENNETH M. BERNSTEIN
BARBARA A. PARVIS*
MARION P. METELSKI*
MONIQUE L. RIBANDO
ALISON R. KELLY
KEVIN J. STEIN
W. SCOTT MCCLAVE
BRIAN J. GREENBERG
CATHERINE S. REYNOLDS
DANA R. METES
KARL J. KOLBINGER
RICHARD CHERN

*NOT ADMITTED IN NEW YORK

August 14, 2000

VIA EXPRESS MAIL (EL167821685US)

Honorable Commissioner of Patents
and Trademarks
Washington, D.C. 20231

"Express Mail" mailing label No. EL167821685US

Date of Deposit: August 14, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Name: *Yaron Ruziak*

Signature: *Yaron Ruziak*

Re: New U.S. Patent Application
Title: NETWORK COMMUNICATIONS LINK
filed as a Continuation-In-Part of
Serial Number 08/992,934
Inventor: Yaron Ruziak
Our File: 22350/14

Dear Sir:

Enclosed please find an application in the name of Yaron Ruziak entitled "NETWORK COMMUNICATIONS LINK," comprising the following:

1. a copy of the application including Specification (22 pages); Claims (7 pages); Abstract (1 page); and 9 sheets of drawings;
2. an unexecuted original Declaration and Power of Attorney (2 pages);
3. Utility Transmittal Form (1 page);
4. Fee Transmittal Form (1 page);




August 14, 2000

4. a check in the amount of \$615.00 to cover the filing fee for a small entity.

Please charge any outstanding amount or credit any overpayment of the fee to Deposit Account No. 01-1785. A duplicate copy of this letter is enclosed. Please also acknowledge receipt of the enclosed documents by stamping the enclosed postcard and returning the same to us.

Respectfully submitted,

AMSTER, ROTHSTEIN & EBENSTEIN
Attorneys for Applicants
90 Park Avenue
New York, New York 10016
(212) 697-5995

By 
Michael J. Berger
Registration No. 25,829

Dated: August 14, 2000
New York, New York

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part of co-pending U.S. Patent Application 09/444,422, entitled "Network communications link," filed November 19, 1999, which is a continuation of U.S. Patent Application 08/992,934, filed December 7, 1997, entitled "Network Communications Link." Both of these applications are assigned to the assignee of the present patent application and are incorporated herein by reference.

The present invention relates generally to communication networks, and specifically to wireless communication networks based on infrared radiation.

The Internet is the world's fastest developing mass media channel. Not only are increasing numbers of home computer users using the Internet, but most major television manufacturers are also developing or introducing Internet-connectable television sets. Since Internet connections are made primarily over telephone lines, any Internet-connectable device, whether a television or a conventional computer, must generally be placed in proximity to an existing telephone outlet, or telephone wires must be run to the location of the device.

Wireless computer communication devices and systems are known in the art. For example, cellular modems may be used without the need for telephone wires, but such modems are expensive both to purchase and to use.

A number of industry standards have also been developed for wireless infrared (IR) computer communications, including ASK, IrDA 1.0/1.1 and new,

emerging standards, such as an IR bus for control of computer peripherals. Existing IR wireless communications links generally operate at low speed, however, and carry only limited digital signals, rather than video and voice information. A clear line of sight (LOS) is generally required between the two ends of the link.

Computer local area networks (LANs) based on diffuse infrared transmission are also known in the art, for example, the ControLan System, produced by Moldat of Lod, Israel, and the AndroDat System produced by Androdat GmbH of Puchheim, Germany. Diffuse signals, in contrast to direct signals, are transmitted in all directions, and therefore can create a communication link with any receiver within a given radius of the transmitter. However, the above-mentioned diffuse IR systems require ceiling-mounted relay units, which need to be fixedly mounted and connected to a source of electrical power. Generally speaking, they are not suited for connection of a single computer or Internet-enabled television to a communication line in a home or small office.

Elcom Technologies, of Canada, has recently announced the "EZONLINE" modem, which operates by modulating AC power lines, but this new technology is not yet widely used or available, nor is it really wireless, since it simply uses the AC lines in place of the telephone wires. Other companies which produce products for the communication of information over power lines, or which distribute information useful for understanding this technique, include ABP Power T&D Corp. (Raleigh, NC), Adaptive Networks (Brighton, MA), CEBus Industry Council (Indianapolis, IN), Echelon Corp. (Palo Alto, CA), Elcom Technologies Corp. (Malvern, PA), Electric Power Research Institute (Palo Alto, CA), Electronics Industries Association (Washington, DC), Intellon Corp.

36069s6

(Ocala, FL), Novell, Inc. (Provo, UT), and X-10 USA, Inc.
(Closter, NJ).

004180.0186396

SUMMARY OF THE INVENTION

It is an object of some aspects of the present invention to provide improved devices and systems for wireless computer communications.

It is another object of some aspects of the present invention to provide a wireless link between a television set and a computer network, such as the Internet.

It is a further object of some aspects of the present invention to provide a wireless control link between a television set or a computer and peripheral devices associated therewith.

It is still a further object of some aspects of the present invention to provide devices and systems for wireless telephone communications within a home or office. It is an additional object of some aspects of the present invention to provide wireless communication devices and systems that do not require a clear line of sight between the communication devices.

In preferred embodiments of the present invention, a wireless IR communications link comprises a base unit and one or more remote units. The base and remote units communicate with one another by transmitting and receiving modulated, diffuse IR radiation. The base unit is connected to a wired communication line, such as a telephone line, a cable television line, or an alternating current (AC) power line, which carries modulated communication signals, as is known in the art. Each of the remote units is preferably connected to a respective audiovisual device, such as a personal computer (PC) having a universal serial bus (USB) outlet or modem connection, or a suitably-equipped television set. Alternatively, the remote units are connected to a peripheral device, such as a keyboard, associated with such an audiovisual device. The communications link allows the audiovisual device or devices to receive and

send signals over the communications line, without any wired connection to the line. The peripheral device may be used to control and interact with the audiovisual device, similarly without the need for a wired connection therewith.

Unlike IR data links known in the art, the communications link of the present invention operates at high speed, preferably between 192 kbps and 2 Mbps, most preferably at least 1 Mbps, suitable for interactive multimedia transmission. The link may therefore be used to couple the audiovisual device to a network, such as the Internet, via the telephone line or other suitable data line, including ISDN and PTSN lines, as are known in the art. The link is also suitable for conveying voice communications.

Furthermore, because the link is based on transmission and reception of diffuse IR radiation, there need not be a clear line of sight between the base and remote units. The radiation transmitted by one of the units is received by the other unit after reflection (generally diffuse reflection) from one or more surfaces in a vicinity of the units. The link is preferably used in an enclosed, indoor area, in which the IR radiation is reflected from the walls and ceiling of the area. There is no need for IR relay units mounted on the ceiling or on other surfaces, as in diffuse IR systems known in the art, and no requirement for any special wiring or installation.

In some preferred embodiments of the present invention, the base unit is fixed to (a) a telephone wall outlet, (b) a cable television wall outlet, or (c) an AC power line outlet, and one of the one or more remote units is fixed to a personal computer. The communications link enables a user of the PC or television set to connect to a computer network,

preferably the Internet, and to browse and view multimedia programs transmitted on the network.

Although in some preferred embodiments, only a single remote unit may be used, in other preferred embodiments of the present invention, the link connects the base unit with multiple remote units simultaneously. The base unit may communicate with the multiple remote units one at a time, in sequence, or over multiple, parallel channels. One of the units, preferably one of the remote units that is connected to a PC or Internet-enabled television, is assigned to serve as a master unit, which synchronizes and monitors transmissions from the other units. Preferably, each of the units transmits during a predetermined time slot, in accordance with a time-division multiple access (TDMA) scheme. In this manner, multiple units, preferably up to four units, but alternatively even greater numbers of units, can be linked simultaneously substantially without mutual interference.

Although preferred embodiments are described herein with reference to certain types of audiovisual devices and their connections primarily to (a) telephone communication lines, (b) cable television lines, or (c) AC power lines, it will be appreciated that the principles of the present invention may similarly be applied to produce wireless, diffuse IR communication links for other purposes. For example, such communications links may be used to connect a cordless telephone handset to a receiver, or to connect a portable Personal Digital Assistant (PDA) to a desktop computer, or to connect a digital camera to a PC or a printer. IR communication links in accordance with the principles of the present invention may carry either digital or analog data, and may operate in either half-duplex or full-duplex mode.

There is therefore provided, in accordance with a preferred embodiment of the present invention, a wireless communications link between a communication line connector and at least one audio-visual device, said communications link including:

a communication line side unit including:

a communication line side connector for engagement with said communication line connector for bidirectional audio-visual data communication, providing communication between a communication line and said at least one audio-visual device;

a communication line side infrared transmitter adapted to transmit diffuse infrared radiation corresponding to said data communication; and

a communication line side infrared receiver adapted to receive diffuse infrared radiation corresponding to said data communication; and

an audio-visual device side unit including:

an audio-visual device side connector for engagement with said at least one audio-visual device for bidirectional signal communication therewith via a universal serial bus (USB);

an audio-visual device side infrared transmitter adapted to transmit diffuse infrared radiation to said communication line side infrared receiver; and

an audio-visual device side infrared receiver adapted to receive diffuse infrared radiation from said communication line side infrared transmitter.

Preferably, said communication line includes a telephone line, and said communication line side connector is adapted to provide communication between said telephone line and said at least one audio-visual device.

Alternatively or additionally, said communication line includes a cable television line, and said communication line side connector is adapted to

provide communication between said cable television line and said at least audio-visual device. Further alternatively or additionally, said communication line includes a power line, and said communication line side connector is adapted to provide communication between said power line and said at least one audio-visual device.

In a preferred embodiment, said at least one audio-visual device includes a television, and said signal communication includes communication of television information over the internet.

In a preferred embodiment, said communication line side unit also includes a unitary housing enclosing said communication line side connector, said communication line side infrared transmitter and said communication line side infrared receiver.

In a preferred embodiment, said audio-visual device side unit also includes a unitary housing enclosing said audio-visual device side connector, said audio-visual device side infrared transmitter, and said audio-visual device side infrared receiver.

In a preferred embodiment, said at least one audio-visual device includes a computer. Alternatively or additionally, said audio-visual device side unit is external to said at least one audio-visual device. Further alternatively or additionally, said signal communication is full-duplex communication.

There is further provided, in accordance with a preferred embodiment of the present invention, a wireless communications adapter between a cable television line (CTL) connector and at least one audio-visual device, said communications link including:

a CTL side connector for engagement with said CTL connector for bidirectional audio-visual data

communication, providing data communication between a CTL and said at least one audio-visual device;

a CTL side infrared transmitter adapted to transmit diffuse infrared radiation corresponding to said data communication; and

a CTL side infrared receiver adapted to receive diffuse infrared radiation corresponding to said data communication.

Preferably, the wireless communications adapter includes:

an audio-visual device side connector for engagement with said at least one audio-visual device for bidirectional signal communication therewith;

an audio-visual device side infrared transmitter adapted to transmit diffuse infrared radiation to said CTL side infrared receiver; and

an audio-visual device side infrared receiver adapted to receive diffuse infrared radiation from said CTL side infrared transmitter.

In a preferred embodiment, said at least one audio-visual device includes a television. Preferably, said data communication includes communication of television information over the internet.

In a preferred embodiment, a unitary housing is provided, enclosing said CTL side connector, said CTL side infrared transmitter and said CTL side infrared receiver.

There is still further provided, in accordance with a preferred embodiment of the present invention, a wireless communications adapter between an alternating current (AC) power line connector and at least one audio-visual device, said power line connector providing a connection to an AC power line over which communication signals are modulated, said communications link including:

an AC power line side connector for engagement with said AC power line connector;

a line modem, for providing bidirectional audio-visual data communication over said AC power line with said at least one audio-visual device;

an AC power line side infrared transmitter adapted to transmit diffuse infrared radiation corresponding to said data communication; and

an AC power line side infrared receiver adapted to receive diffuse infrared radiation corresponding to said data communication.

Preferably, there is provided:

an audio-visual device side connector for engagement with said at least one audio-visual device for bidirectional signal communication therewith;

an audio-visual device side infrared transmitter adapted to transmit diffuse infrared radiation to said AC power line side infrared receiver; and

an audio-visual device side infrared receiver adapted to receive diffuse infrared radiation from said AC power line side infrared transmitter.

In a preferred embodiment, there is provided a unitary housing enclosing said AC power line side connector, said AC power line side infrared transmitter and said AC power line side infrared receiver.

There is yet further provided, in accordance with a preferred embodiment of the present invention, a method for wireless communications between a communication line and at least one audio-visual device, including exchanging audio-visual data in a bidirectional manner, using diffuse infrared radiation, between an infrared unit coupled to said communication line and an infrared unit coupled via a universal serial bus (USB) to said at least one audio-visual device.

There is also provided, in accordance with a preferred embodiment of the present invention, a method for wireless communications between a cable television line and at least one audio-visual device, including exchanging audio-visual data in a bidirectional manner, using diffuse infrared radiation, between an infrared unit coupled to said cable television line and an infrared unit coupled to said at least one audio-visual device.

There is additionally provided, in accordance with a preferred embodiment of the present invention, a method for wireless communications between an alternating current (AC) power line and at least one audio-visual device, including exchanging audio-visual data in a bidirectional manner, using diffuse infrared radiation, between an infrared unit coupled to said power line and an infrared unit coupled to said at least one audio-visual device.

The present invention will be more fully understood from the following detailed description of the preferred embodiments thereof, taken together with the drawings in which:

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1A is a schematic, pictorial illustration showing a wireless communications link in accordance with a preferred embodiment of the present invention;

Fig. 1B is a schematic, pictorial illustration showing a wireless communications link in accordance with another preferred embodiment of the present invention;

Fig. 1C is a schematic, pictorial illustration showing a wireless communications link in accordance with still another preferred embodiment of the present invention;

Fig. 2A is a schematic, pictorial illustration showing a wireless communication link in accordance with a preferred embodiment of the present invention;

Fig. 2B is a schematic, pictorial illustration showing a wireless communication link in accordance with another preferred embodiment of the present invention;

Fig. 3A is a schematic block diagram of a base unit in the link of Fig. 1, in accordance with a preferred embodiment of the present invention;

Fig. 3B is a schematic block diagram of a remote unit in the link of Fig. 1, in accordance with a preferred embodiment of the present invention;

Fig. 3C is a schematic block diagram of another remote unit in the link of Fig. 1, in accordance with a preferred embodiment of the present invention;

Fig. 4 is a schematic timing diagram illustrating a time-division multiple access (TDMA) scheme used in the link of Fig. 1, in accordance with a preferred embodiment of the present invention;

Fig. 5A is a schematic block diagram of a base unit in the link of Fig. 2A, in accordance with an alternative embodiment of the present invention;

Fig. 5B is a schematic block diagram of a remote unit in the link of Fig. 2A, in accordance with an alternative embodiment of the present invention;

Fig. 5C is a schematic timing diagram illustrating a time-division multiple access (TDMA) scheme for use with the base and remote units of Figs. 5A and 5B, in accordance with a preferred embodiment of the present invention;

Fig. 6A is a schematic illustration of an optical receiver, for use in the base and remote units of Figs. 5A and 5B, in accordance with a preferred embodiment of the present invention; and

Fig. 6B is a schematic illustration of an optical receiver, for use in the base and remote units of Figs. 5A and 5B, in accordance with another preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference is now made to Figs. 1A, 1B, and 1C, which are illustrations of a network communications link 20, in accordance with respective preferred embodiments of the present invention. Link 20 comprises a base unit 22, which transmits and receives modulated diffuse IR radiation to/from remote units 24 and 26. Remote unit 24 is preferably located on, or built into a web-enabled television 28. Remote unit 26 is preferably located in or fixed to a keyboard 30.

Alternatively or additionally, base unit 22 may transmit and receive radiation to/from remote units located on or built into a digital camera 27 or a personal data assistant 29.

Link 20 enables a user of television 28 to communicate over the Internet or other computer network through base unit 22. The term "web-enabled" as used herein means that the television includes circuitry for computer network communications, using the television screen as a computer monitor.

It is noted that although in Figs. 1A, 1B, and 1C, the remote units are in the preferred form of printed circuit boards installed in television 28 and keyboard 30, the remote units may also be fabricated in different forms. Other preferred forms include external assemblies that can be plugged into the television, keyboard or other remote device.

In the embodiment shown in Fig. 1A, base unit 22 is connected to a wired communication line 32, preferably a telephone wire, located in a wall 34. Alternatively, as shown in Fig. 1B, base unit 22 is connected to a cable television line 36. Further alternatively, as shown in Fig. 1C, base unit 22 is connected through a line modem 39 to an AC power line 38. In this latter case, unit 22 preferably receives power from line 38, in addition to

exchanging data therewith. Typically, unit 22 and line modem 39 comprise, or are configured to operate in conjunction with, data communication products made or described by the companies or organizations listed in the Background section of the present patent application.

In preferred embodiments of the present invention, base unit 22 communicates with remote units 24 and 26 via diffuse IR radiation, and therefore the location of base unit 22 on wall 34 does not have to be in the line of sight (LOS) of remote units 24 and 26. The wireless communication link may be created by the reflection of the diffuse IR radiation from wall 34, or from other surfaces within a radius of several meters at least.

Fig. 2A is an illustration of a network communications link 40 in accordance with another preferred embodiment of the present invention. Base unit 22 transmits and receives modulated diffuse IR radiation to/from a remote unit 42. Remote unit 42 preferably connects to a connector 48 located on a modem card 46, installed in a personal computer 50. Base unit 22 is connected to a wired communication line, substantially as described above. In this case, link 40 enables a user of computer to communicate over a computer network. Remote unit 42 is preferably self-contained and plugs into connector 48 on the rear panel of the computer, as shown in the figure.

Fig. 2B is an illustration of a network communications link 41, in accordance with a preferred embodiment of the present invention. Link 41 is generally similar to link 40 described hereinabove with reference to Fig. 2B, but differs in that a universal serial bus (USB) 58 couples computer 50 to remote unit 42. By virtue of the use of USB 58 in this embodiment, remote unit 42 enables IR communications over link 41 at

higher speed than can typically be achieved using a modem connection.

Fig. 3A is a schematic block diagram of base unit 22. Wired communication line 32 is linked to a line interface chip 60, for example, a Cermtec DAA model CH1837, in the base unit. Chip 60 receives and demodulates electrical signals from line 32, as is well known in the communications art, and conveys the demodulated signals to an ASIC chip 62. ASIC 62 preferably comprises a FPGA, and includes a CODEC and modulator and demodulator blocks. Such blocks are known in the art, and the design and production of ASIC 62 are within the capabilities of those skilled in the art of semiconductor devices. ASIC 62 encodes the electrical signals from chip 60 as pulses which drive an IR transmitter 64, which preferably comprises an LED with suitable driver circuitry. The IR signals transmitted by transmitter 64 are received by remote units 24 and 26, as described below.

Unit 22 further includes an IR receiver 66, comprising a photodiode with suitable optics for receiving diffuse IR signal from remote units 24 and 26. ASIC 62 receives electrical signals from receiver 66, decodes these signals and conveys them to chip 60. The chip generates appropriately modulated signals for transmission over line 32.

The transmission and reception of the data by chip 60 and ASIC 62 are controlled by a microcontroller 68, which performs line switching and signaling functions. Microcontroller preferably comprises a Philips 8051 microcontroller chip. Alternatively, the microcontroller may be embedded in ASIC 62. Unit 22 is preferably powered by rechargeable batteries (not shown in the figure), which are preferably recharged from the telephone line power.

Fig. 3B is a schematic block diagram of remote unit 24. Remote unit 24, in its preferred configuration, comprises a printed circuit card which is installed in an audiovisual device, such as television 28.

The circuitry of television 28, preferably personal computer circuitry embedded in the television, connects to a personal computer (PC) interface chip 70 in unit 24. Chip 70 may be identical to line interface chip 60, shown in Fig. 3A, and interacts with ASIC 62 and microcontroller 68 in a manner substantially similar to that described in detail above with reference to chip 60 in unit 22.

Fig. 3C is a schematic block diagram remote unit 26. Remote unit 26, in its preferred configuration, comprises a printed circuit card which is installed in a peripheral device, such as keyboard 28. ASIC 62, located on unit 26, communicates with IR transmitter 64 and IR receiver 66 in a manner similar to that described in detail above. Microcontroller 68 receives user input data from keyboard 30 in a manner well known in the art, and conveys the data to ASIC 62 for transmission via transmitter 64, as described above.

In an alternative preferred embodiment, the functions of some or all of the components in units 22, 24 and 26, including chip 60, ASIC 62, IR transmitter 64, IR receiver 66, microcontroller 68 and chip 70, may be incorporated into one device or component, and relevant modules in that device may be enabled as applicable.

Fig. 4 is a schematic timing diagram representing a time-division multiple access (TDMA) scheme, or time sequencing, for transmission and reception of IR signals by units 22, 24 and 26 making up link 20, in accordance with a preferred embodiment of the present invention. As shown in Fig. 4, each communication frame is divided into multiple time slots. Preferably, the data transmission

rate is between 192 kbps and 2 Mbps. In the example shown in the figure, there are 16 time slots in a frame, the transmission rate is 1.024 Mbps, and each slot includes 64 bytes of data. Thus, each slot occupies 0.5 msec, and the frame length is 8 msec. Other data rates and TDMA schemes may also be used, however. The TDMA scheme facilitates orderly data transfer over link 20, with as many as four different transmit/receive units operating simultaneously, and avoids data/communication overlap among the units.

One unit, preferably unit 24, connected to the computer, acts as the master, with all the other units as slaves. Unit 24 issues a System Sync signal during the first slot, which synchronizes the other (slave) units. The slave units, which are normally in a low-power standby mode, use the second time slot to signal master unit 24 to enter an active communication mode. Slots 4, 5, 6 and 7 are allotted for master unit 24 to transmit signals to the slaves. During times other than the allotted time, unit 24 receives signals from units 22 and 26. Unit 22 is slotted to transmit in slots 8, 9, 10 and 11, and similarly, keyboard unit 26 is slotted in slots 12, 13, 14 and 15.

Figs. 5A and 5B are schematic block diagrams illustrating a base unit 70 and a remote unit 80, respectively, in accordance with an alternative embodiment of the present invention. Base unit 70 and remote unit 80 may be used, for example, in place of base unit 22 and remote unit 42, respectively, in link 40, as shown in Fig. 2. Units 70 and 80 each comprise a line interface chip 72, which is preferably of a type suitable for interfacing to a PSTN telephone line, as is known in the art. Each of units 70 and 80 also comprises a two-channel, full-duplex analog transceiver 74, coupled to IR transmitter 64 and IR receiver 66 and controlled by microprocessor 68. These transceivers enable units 70 and

80 to communicate with one another over a full-duplex analog link at two carrier frequencies (CARRIER 1 and CARRIER 2 in the figure), preferably between 2 and 10 MHz, for example, 3.6 and 4.0 MHz.

Fig. 5C is a schematic timing diagram representing a full-duplex TDMA scheme based on carrier wave modulation, for transmission and reception of IR signals by units 70 and 80, in accordance with a preferred embodiment of the present invention. One of the units, for example, unit 70, is chosen to be the master unit, and transmits signals over CARRIER 1 while receiving signals over CARRIER 2. The other unit, in this case unit 80, functions as a slave, receiving signals on CARRIER 1 and transmitting on CARRIER 2. As in the example of Fig. 4, each communication frame is divided into multiple time slots. Following a synchronization slot, two slots are preferably respectively allocated for units 70 and 80 to transmit two channels of data, so as to communicate with one another and with any peripheral units, such as keyboard 30, shown in Figs. 1A, 1B, and 1C. Thereafter, time slots (marked P1, P2 and P3) are allocated to the peripheral units, to communicate with units 70 and 80. It will be understood that greater or lesser numbers of time slots, data channels and peripheral units may similarly be used.

Fig. 6A is a schematic illustration showing details of IR receiver 66, in accordance with a preferred embodiment of the present invention. Receiver 66 is shown in Fig. 6A as communicating with transceiver 74, shown in Figs. 5A and 5B, but it will be understood that this receiver may equally be used in any of the other base or remote units described herein.

Receiver 66 comprises a photodiode 82, which includes an optically active area 86, and whose output is preferably coupled via a preamplifier 92 to transceiver

74. A non-imaging dielectric totally-internally-reflecting concentrator 88 is optically coupled at an exit surface 84 thereof to area 86, preferably using a suitable optical bonding material. Concentrator 88 preferably comprises an optical plastic having a refractive index in the range 1.45 to 1.65, such as acrylic or polycarbonate, or alternatively may comprise an optical glass or other suitable dielectric material. Bonding material 84 preferably comprises optical epoxy or UV-cured optical cement, as are known in the art, and is chosen to give good index matching between concentrator 88 and active area 86 in order to reduce reflection losses. Alternatively, the entire assembly of receiver 66 may be molded as an integral unit, preferably by methods of injection molding known in the art.

Concentrator 88 has an acceptance angle θ , as shown in Fig. 6A, which is designed to meet the needs of a diffuse IR communications link, in accordance with preferred embodiments of the present invention, by proper selection of the shape of the concentrator and of an entrance surface 90 of the concentrator. In Fig. 6A, surface 90 is convex, so as to reduce the overall size of concentrator 88 while providing a relatively large acceptance angle, but a flat entrance surface may also be used. IR light passing through surface 90 undergoes total internal reflection at the side walls concentrator 88, with the result that the concentrator has a high, substantially uniform light collection efficiency over substantially the entire acceptance angle θ . Preferably, concentrator 88 is designed to give θ in the range of 40° - 50° (half angle), which has been found to be optimal for diffuse IR communication links such as link 20 (Figs. 1A, 1B, and 1C) or links 40 and 41 (Figs. 2A and 2B).

Although photodiodes with integral lenses are known in the art, their collection efficiency is typically non-

uniform and may drop substantially at angles away from the optical axis. Such non-uniform response tends to cause poor and/or inconsistent reception in diffuse IR systems. By providing substantially uniform reception over a wide angle, receiver 66 using concentrator 88 improves the signal/noise ratio, reliability and insensitivity to angular alignment of IR communication links such as those described hereinabove.

Fig. 6B is a schematic illustration showing a compound parabolic concentrator 92, coupled to photodiode 82, in accordance with another preferred embodiment of the present invention. Concentrator 92 has a generally flat entrance surface 94 and paraboloidal side walls. Light entering through surface 94 is concentrated onto active area 86 by internal reflection at the side walls, providing a high degree of concentration. Concentrator 92 is preferably produced and bonded to photodiode 82 substantially as described above with reference to concentrator 88.

Other types of concentrators may also be designed based on the principles of concentrators 88 and 92. For example, an astigmatic concentrator (not shown in the figures) may be designed to concentrate radiation in only one angular direction, but not in an orthogonal direction, in a manner similar to a cylindrical lens, or to concentrate radiation over a different acceptance angle in one direction than in the other. Alternatively or additionally, multiple photodiodes, each with its own concentrator and pointed in different directions, may be used together to provide wider angular coverage. It will further be appreciated that similar concentrators may be coupled to a LED or laser diode emitter in transmitter 64, in order to give uniform, wide-angle IR output therefrom. Such concentrators may be used in any of base or remote IR communication units 22, 24, 26, 42, 70 or 80, as described hereinabove, as well as in other diffuse

IR communication links in accordance with the principles of the present invention.

It will be appreciated by persons skilled in the art that the present invention is not limited to what has been particularly shown and described hereinabove. Rather, the scope of the present invention includes both combinations and sub-combinations of the various features described hereinabove, as well as variations and modifications thereof that are not in the prior art which would occur to persons skilled in the art upon reading the foregoing description.

09638810-081400

CLAIMS

1. A wireless communications link between a communication line connector and at least one audio-visual device, said communications link comprising:

a communication line side unit including:

a communication line side connector for engagement with said communication line connector for bidirectional audio-visual data communication, providing communication between a communication line and said at least one audio-visual device;

a communication line side infrared transmitter adapted to transmit diffuse infrared radiation corresponding to said data communication; and

a communication line side infrared receiver adapted to receive diffuse infrared radiation corresponding to said data communication; and

an audio-visual device side unit including:

an audio-visual device side connector for engagement with said at least one audio-visual device for bidirectional signal communication therewith via a universal serial bus (USB);

an audio-visual device side infrared transmitter adapted to transmit diffuse infrared radiation to said communication line side infrared receiver; and

an audio-visual device side infrared receiver adapted to receive diffuse infrared radiation from said communication line side infrared transmitter.

2. A wireless communications link according to claim 1, wherein said communication line includes a telephone line, and wherein said communication line side connector is adapted to provide communication between said telephone line and said at least one audio-visual device.

3. A wireless communications link according to claim 1, wherein said communication line includes a cable television line, and wherein said communication line side connector is adapted to provide communication between said cable television line and said at least audio-visual device.

4. A wireless communications link according to claim 1, wherein said communication line includes a power line, and wherein said communication line side connector is adapted to provide communication between said power line and said at least one audio-visual device.

5. A wireless communications link according to claim 1 and wherein said at least one audio-visual device comprises a television.

6. A wireless communications link according to claim 5 and wherein said signal communication comprises communication of television information over the internet.

7. A wireless communications link according to claim 1 and wherein said communication line side unit also comprises a unitary housing enclosing said communication line side connector, said communication line side infrared transmitter and said communication line side infrared receiver.

8. A wireless communications link according to claim 1 and wherein said audio-visual device side unit also comprises a unitary housing enclosing said audio-visual device side connector, said audio-visual device side infrared transmitter, and said audio-visual device side infrared receiver.

9. A wireless communication link according to claim 1 and wherein said at least one audio-visual device comprises a computer.

004420-01888396

10. A wireless communications link according to claim 1 and wherein said audio-visual device side unit is external to said at least one audio-visual device.

11. A wireless communications link according to claim 1 and wherein said signal communication is full-duplex communication.

12. A wireless communications adapter between a cable television line (CTL) connector and at least one audio-visual device, said communications link comprising:

a CTL side connector for engagement with said CTL connector for bidirectional audio-visual data communication, providing data communication between a CTL and said at least one audio-visual device;

a CTL side infrared transmitter adapted to transmit diffuse infrared radiation corresponding to said data communication; and

a CTL side infrared receiver adapted to receive diffuse infrared radiation corresponding to said data communication.

13. A wireless communications adapter according to claim 12, and comprising:

an audio-visual device side connector for engagement with said at least one audio-visual device for bidirectional signal communication therewith;

an audio-visual device side infrared transmitter adapted to transmit diffuse infrared radiation to said CTL side infrared receiver; and

an audio-visual device side infrared receiver adapted to receive diffuse infrared radiation from said CTL side infrared transmitter.

14. A wireless communications adapter according to claim 12 and wherein said at least one audio-visual device comprises a television.

15. A wireless communications adapter according to claim 12 and wherein said data communication comprises

communication of television information over the internet.

16. A wireless communications adapter according to claim 12 and comprising a unitary housing enclosing said CTL side connector, said CTL side infrared transmitter and said CTL side infrared receiver.

17. A wireless communication adapter according to claim 12 and wherein said at least one audio-visual device comprises a computer.

18. A wireless communications adapter according to claim 12 and wherein said data communication is full-duplex communication.

19. A wireless communications adapter between an alternating current (AC) power line connector and at least one audio-visual device, said power line connector providing a connection to an AC power line over which communication signals are modulated, said communications link comprising:

an AC power line side connector for engagement with said AC power line connector;

a line modem, for providing bidirectional audio-visual data communication over said AC power line with said at least one audio-visual device;

an AC power line side infrared transmitter adapted to transmit diffuse infrared radiation corresponding to said data communication; and

an AC power line side infrared receiver adapted to receive diffuse infrared radiation corresponding to said data communication.

20. A wireless communications adapter according to claim 19, and comprising:

an audio-visual device side connector for engagement with said at least one audio-visual device for bidirectional signal communication therewith;

an audio-visual device side infrared transmitter adapted to transmit diffuse infrared radiation to said AC power line side infrared receiver; and

an audio-visual device side infrared receiver adapted to receive diffuse infrared radiation from said AC power line side infrared transmitter.

21. A wireless communications adapter according to claim 19 and wherein said at least one audio-visual device comprises a television.

22. A wireless communications adapter according to claim 21 and wherein said data communication comprises communication of television information over the internet.

23. A wireless communications adapter according to claim 19 and comprising a unitary housing enclosing said AC power line side connector, said AC power line side infrared transmitter and said AC power line side infrared receiver.

24. A wireless communication adapter according to claim 19 and wherein said at least one audio-visual device comprises a computer.

25. A wireless communications adapter according to claim 19 and wherein said data communication is full-duplex communication.

26. A method for wireless communications between a communication line and at least one audio-visual device, comprising exchanging audio-visual data in a bidirectional manner, using diffuse infrared radiation, between an infrared unit coupled to said communication line and an infrared unit coupled via a universal serial bus (USB) to said at least one audio-visual device.

27. A method according to claim 26, wherein said communication line includes a telephone line, and wherein exchanging the data comprises providing communication

between the telephone line and the at least one audio-visual device.

28. A method according to claim 26, wherein said communication line includes a cable television line, and wherein exchanging the data comprises providing communication between the cable television line and the at least one audio-visual device.

29. A method according to claim 26, wherein said communication line includes a power line, and wherein exchanging the data comprises providing communication between the power line and the at least one audio-visual device.

30. A method according to claim 26, wherein exchanging the data comprises receiving television information over the internet.

31. A method according to claim 26, wherein exchanging the data comprises exchanging the data using full-duplex communication.

32. A method for wireless communications between a cable television line and at least one audio-visual device, comprising exchanging audio-visual data in a bidirectional manner, using diffuse infrared radiation, between an infrared unit coupled to said cable television line and an infrared unit coupled to said at least one audio-visual device.

33. A method according to claim 32, wherein exchanging the data comprises receiving television information over the internet.

34. A method according to claim 32, wherein exchanging the data comprises exchanging the data using full-duplex communication.

35. A method for wireless communications between an alternating current (AC) power line and at least one audio-visual device, comprising exchanging audio-visual

data in a bidirectional manner, using diffuse infrared radiation, between an infrared unit coupled to said power line and an infrared unit coupled to said at least one audio-visual device.

36. A method according to claim 35, wherein exchanging the data comprises receiving television information over the internet.

37. A method according to claim 35, wherein exchanging the data comprises exchanging the data using full-duplex communication.

001180.01883960

ABSTRACT

A wireless communications link between a communication line connector and at least one audio-visual device is provided. The communications link preferably includes a communication line side unit, including: (a) a communication line side connector for engagement with the communication line connector for bidirectional audio-visual data communication, providing communication between a communication line and the at least one audio-visual device, (b) a communication line side infrared transmitter adapted to transmit diffuse infrared radiation corresponding to the data communication, and (c) a communication line side infrared receiver adapted to receive diffuse infrared radiation corresponding to the data communication. The communications link preferably also includes an audio-visual device side unit, including: (a) an audio-visual device side connector for engagement with the at least one audio-visual device for bidirectional signal communication therewith via a universal serial bus (USB), (b) an audio-visual device side infrared transmitter adapted to transmit diffuse infrared radiation to the communication line side infrared receiver, and (c) an audio-visual device side infrared receiver adapted to receive diffuse infrared radiation from the communication line side infrared transmitter.

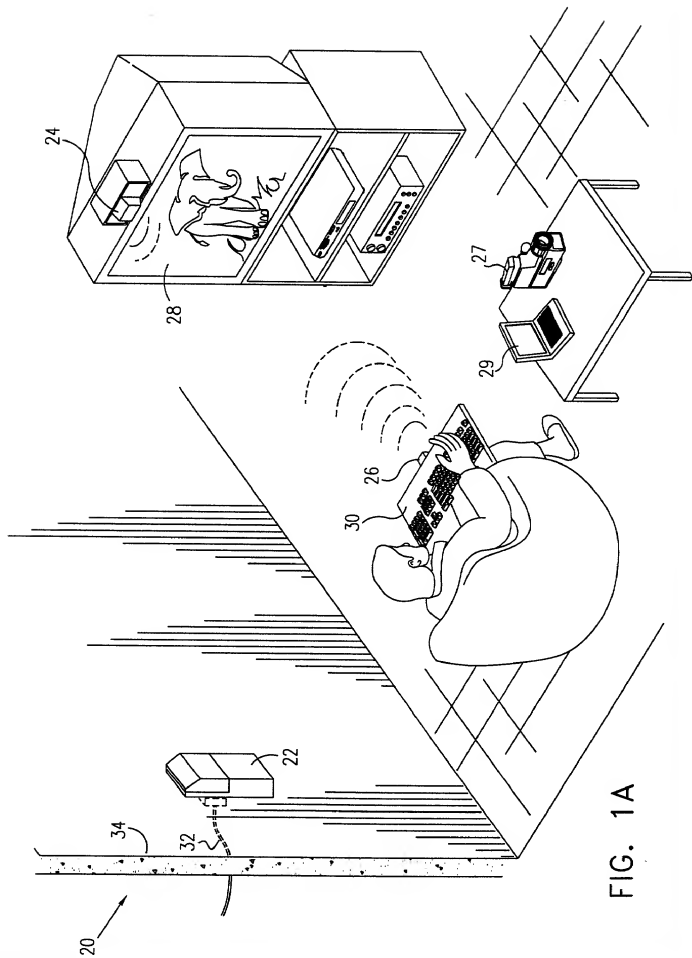


FIG. 1A

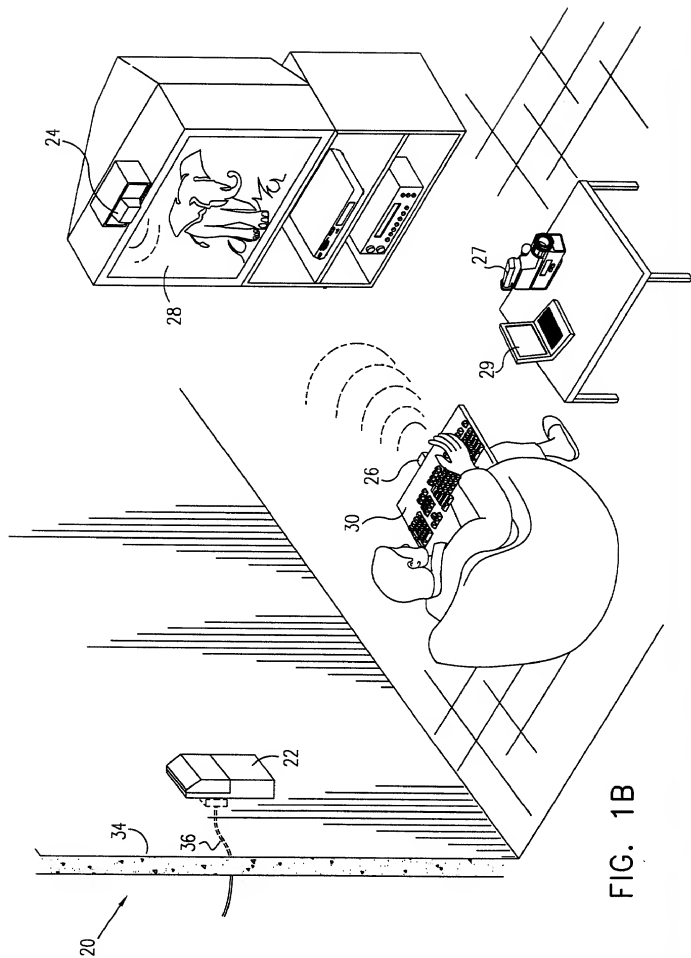


FIG. 1B

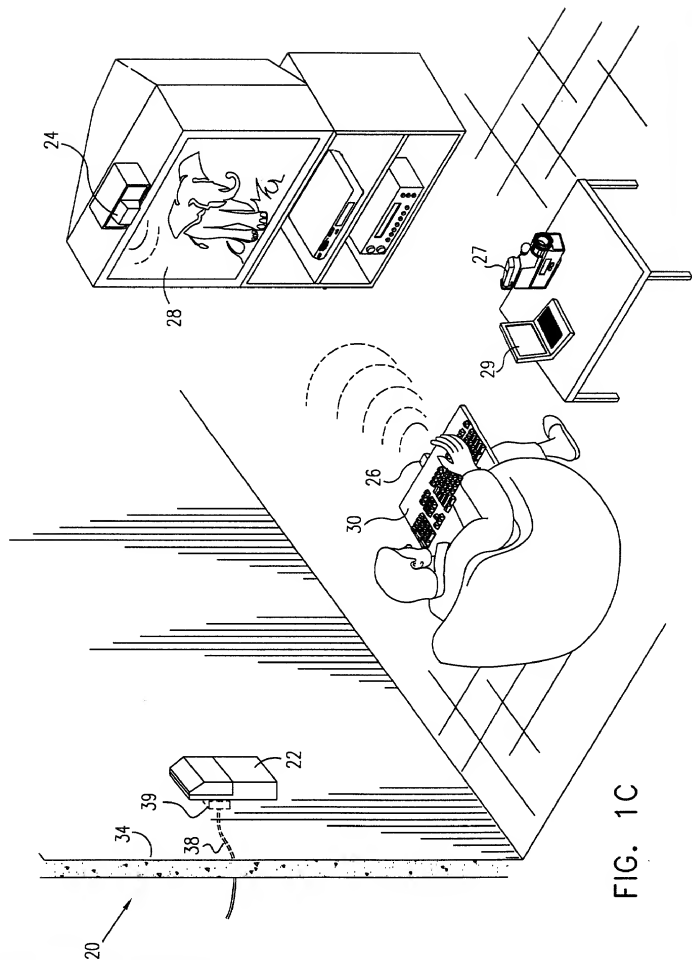


FIG. 1C

FIG. 2A

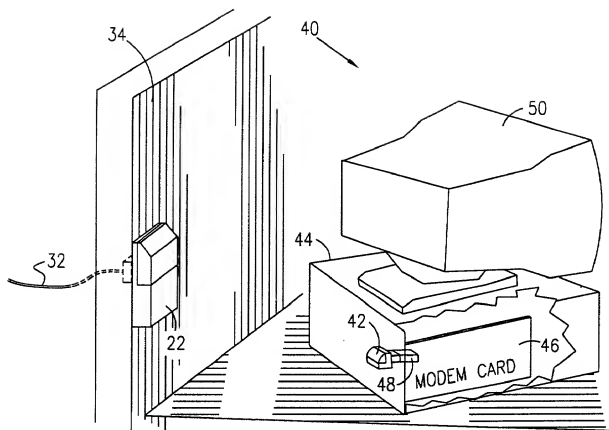


FIG. 2B

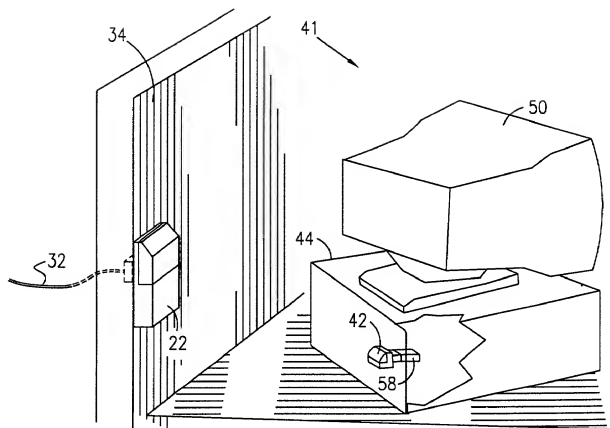


FIG. 3A

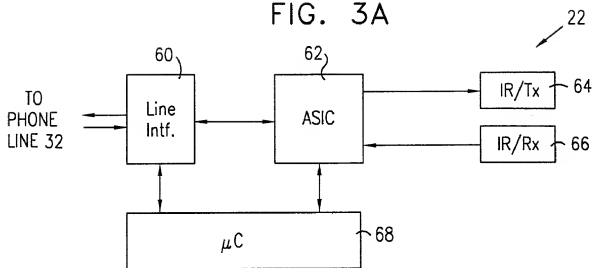


FIG. 3B

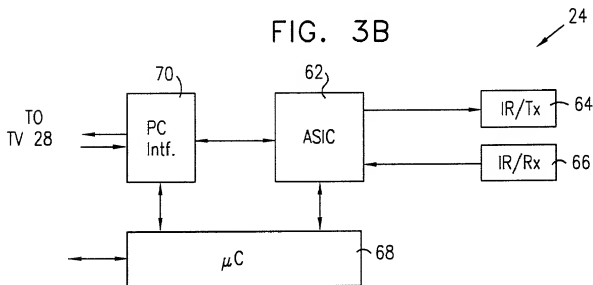
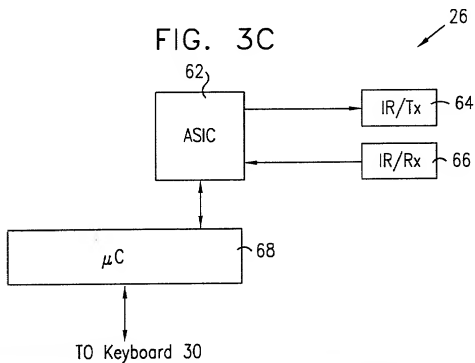


FIG. 3C



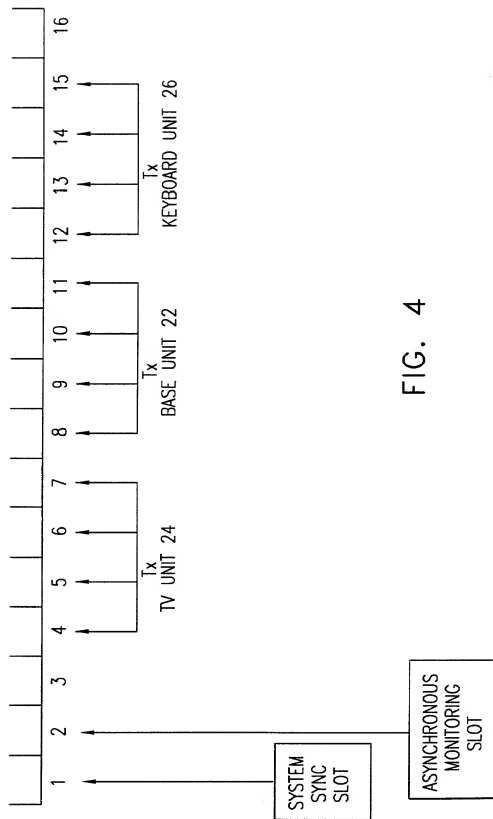


FIG. 4

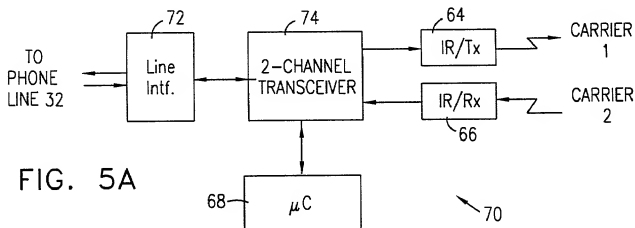


FIG. 5A

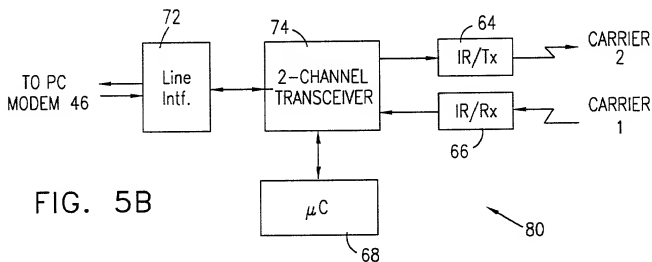


FIG. 5B

FIG. 5C

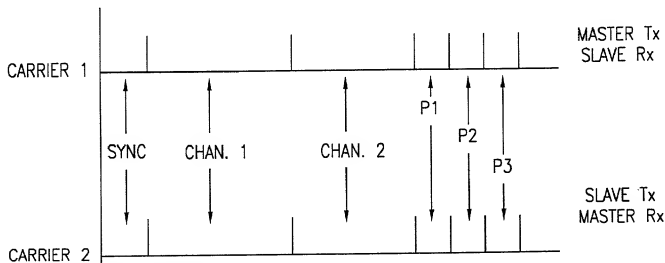


FIG. 6A


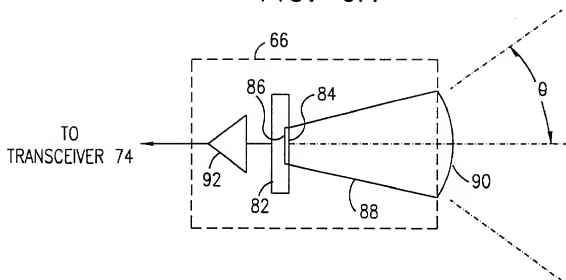


FIG. 6B

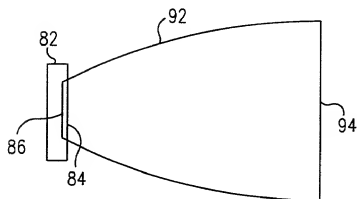

Please type a plus sign (+) inside this box → **+**

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

☒ Declaration Submitted with Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number	22350/14
First Named Inventor	Yaron Ruziak
COMPLETE IF KNOWN	
Application Number	
Filing Date	8/14/2000
Group Art Unit	
Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Network Communications Link

the specification of which (Title of the invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) [] as United States Application Number or PCT International

Application Number [] and was amended on (MM/DD/YYYY) [] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
			<input type="checkbox"/>	YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
		<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

00638810 081400 004180 01883366

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number
Morton Amster	16,677	Joel E. Lutzker	29,406
Michael J. Berger	25,829	Ira E. Slifrin	33,785
Daniel S. Ebenstein	24,932	Leonard S. Sorgi	33,311
Kenneth F. George	30,259	Neil M. Zipkin	27,476
Philip H. Gottfried	25,871	Karl J. Kolbinger	41,124
Abraham Kassan	32,997		
Anthony F. La Glesca	29,403		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label ☐ OR ☒ Correspondence address below

Name	Michael J. Berger / Amster, Rothstein & Ebenstein				
Address	90 Park Avenue				
Address					
City	New York	State	NY	ZIP	10016
Country	U.S.A.	Telephone	212-697-5995	Fax	212-286-0854

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))			Family Name or Surname		
Yaron			Ruziak		
Inventor's Signature					Date
Residence: City	Moshav Avihall	State		Country	Israel
Post Office Address	4 Hapalmach Street				
Post Office Address	4 Hapalmach Street				
City	Moshav	State	Avihall	ZIP	42910
Country	Israel				

☐ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto